


Brief description

Optical multiswitch system to receive complete TV signals of 1,2,3 and 4 satellites via single optical link. The optical multiswitch is a device with integrated optical receiver and multiswitch in one common housing. It is equipped with just one input for connecting of single mode optical cable from optical transmitter output. The complete TV signals of up to 4 satellites and terrestrial TV are received from the optical transmitter via the SC/APC optical input. The subscriber coaxial outputs are made of 75 ohm F connectors. The optical multiswitch is offered with 10 subscriber outputs for direct connection of satellite set top boxes.

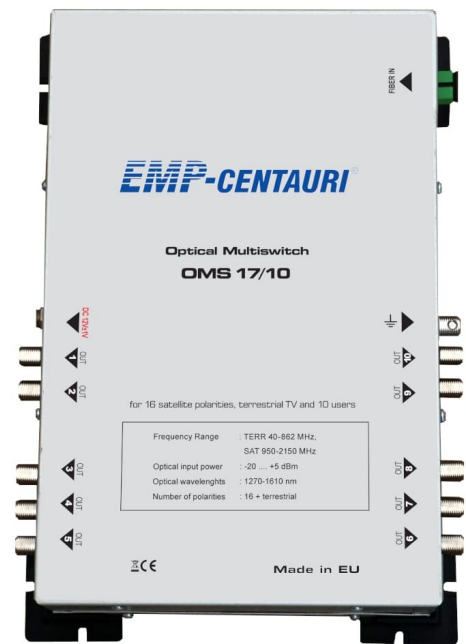

Technical data

Parameter	Value		
Inputs	1 optical (SC/APC), single mode		
Optical wavelenghts	1270 – 1610 nm		
Outputs	10 x F-connector (16 x SAT, 1 x TERR)		
Outputs – Frequency range	SAT 950 – 2150 MHz, TERR 40 – 862 MHz		
Optical input power	-20 +5 dBm		
Output Signal Level Range	+58 +100dBuV		
Compatible optical transmitter	OT17/1FUC-4		
Maximum number of optical splits between OT17/1FUC-4 and OMS17/10	64		
Current consumption	0.18 A (12 V DC)		
Dimensions (w,d,h)	25.5 x 18,0 x 7,0 cm		
Operating temperature range	-25 – +60 °C		
Housing material	Aluminium		
RF Signal level performance based on optical link configuration			
	Recommended input RF level of OT17/1FUC-4:		
	min.	max.	RF gain / loss
Transmitter – Optical multiswitch, direct connection	45 dBuV	85 dBuV	15 dB (gain)
Transmitter – 2way splitter (PLC) – Optical multiswitch	50 dBuV	85 dBuV	4 dB (gain)
Transmitter – 4way splitter (PLC) – Optical multiswitch	55 dBuV	85 dBuV	-2 dB (loss)
Transmitter – 8way splitter (PLC) – Optical multiswitch	60 dBuV	85 dBuV	-8 dB (loss)
Transmitter – 16way splitter (PLC) – Optical multiswitch	65 dBuV	85 dBuV	-14 dB (loss)
Transmitter – 32way splitter (PLC) – Optical multiswitch	70 dBuV	85 dBuV	-20 dB (loss)
Transmitter – 64way splitter (PLC) – Optical multiswitch	75 dBuV	85 dBuV	-25 dB (loss)

Postal address: EMP-Centauri s.r.o. 5. května 690 339 01 Klatovy Czech Republic

Management: Tel.: +420 376 323 813 Tel.: +420 603 497 419 E-mail: info@emp-centauri.cz

Sales department: Tel.: +420 376 323 813 Tel.: +420 603 497 419 Tel.: +420 776 619 976 (EN) Tel.: +420 778 066 654 (CZ) E-mail: sales@emp-centauri.cz

Purchase department: E-mail: purchase@emp-centauri.cz

Technical support: Tel.: +420 376 323 853 (during workhours) Hotline: +420 603 497 419 (available anytime) E-mail: support@emp-centauri.cz